invacu
.com

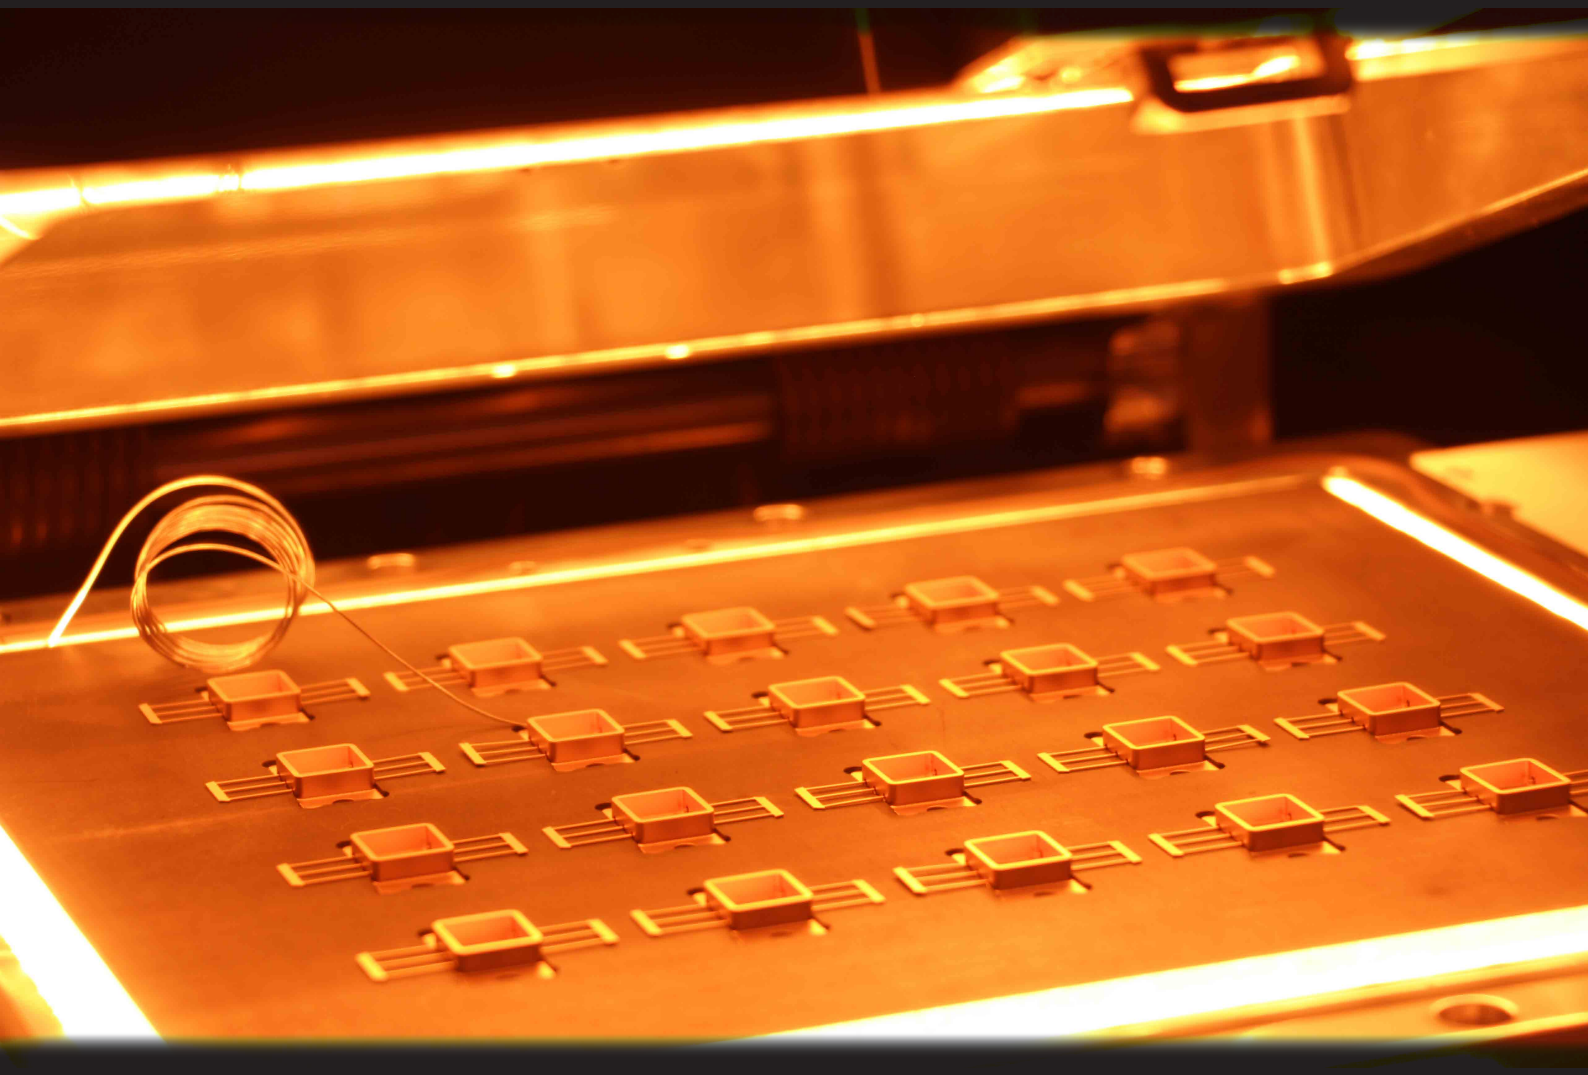

Vacuum

Reflow

Soldering

Systems

VSU 12 / 28 / 45

Programmable vacuum ovens

XS 100 mm
100 mm

M 210 mm
260 mm

variety of options

xray comparison

void-free attach

vacuum assisted bonding process

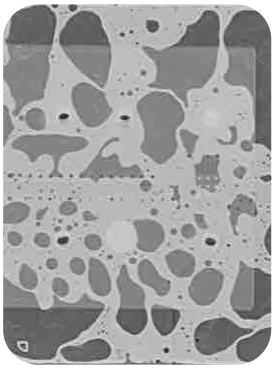

no vacuum

with vacuum

invacu.com

Wide product range:

single sample R&D
to multi-batch
production
solutions

650 °C max.

4.5 bar max.

heating area

XL

420 mm

420 mm

3D

power profile

bottom & top heating

low nitrogen consumption

individual heater control

high temperature accuracy

formic acid bubbler with automatic refill

independent overheat protection

North American Distributors:

CWI Technical Sales
704 Ginesi Drive, Suite 11A
Morganville, NJ 07751
Tel: 732-536-8600
sales@cwitechsales.com

Invacu Ltd.

Odrin 2 str.
8001 Burgas
Bulgaria
Tel./Fax: +359 56 813631
info @ invacu.com

printed 4/2019