

LXI™-Certified 7mm Automated Tuners

DATA SHEET / 4T-050G07



MODELS:
XT982GL01
XT982GL30
XT982AL02

XT-SERIES TUNERS REPRESENT THE NEXT EVOLUTION IN TUNER TECHNOLOGY. FASTER, MORE ACCURATE, MORE REPEATABLE.

Products covered by one or more of the following patents
9,209,786 / 8,823,392 / 7,589,601 B2




What is load pull?


Load Pull is the act of presenting a set of controlled impedances to a device under test (DUT) and measuring a set of parameters at each point. By varying the impedance, it is possible to fully characterize the performance of a DUT and use the data to:

- > Verify simulation results of a transistor model (model validation)
- > Gather characterization data for model extraction (behavioral model extraction)
- > Design amplifier matching networks for optimum performance (amplifier design)
- > Ensure a microwave circuit's ability to perform after being exposed to high mismatch conditions (ruggedness test)
- > Confirm the stability or performance of a microwave circuit or consumer product under non-ideal VSWR conditions (stability/performance/conformance/antenna test)


Example of load pull measurements with Output Power (Pout) contours plotted on a Smith Chart.

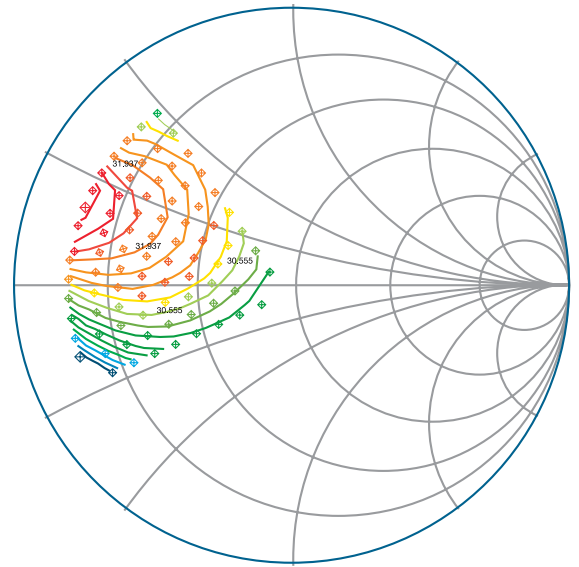

Iso Pout Contours Measured @ 1.85 GHz

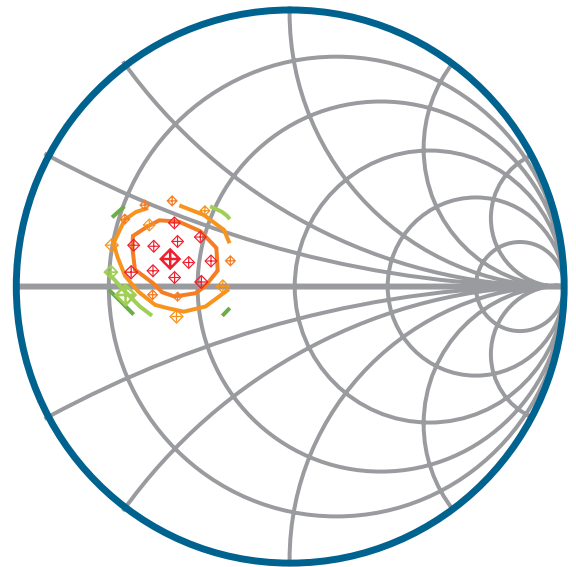


Iso Pout Contours Simulated @ 1.85 GHz

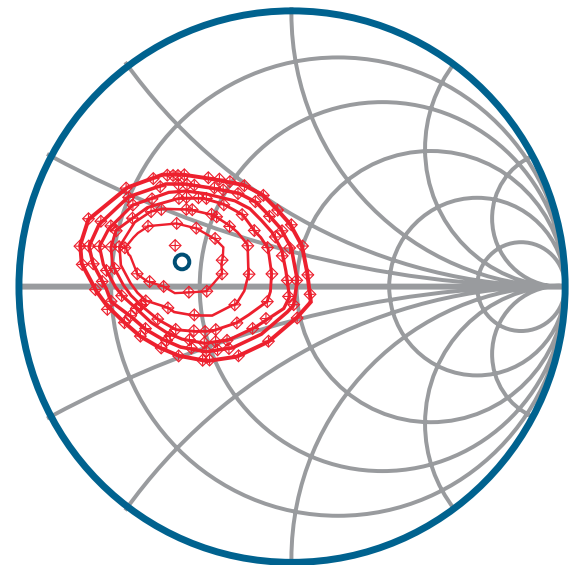



Slide-Screw Impedance Tuner

One tool available to vary the impedances presented to a DUT is the slide-screw impedance tuner. The slide-screw tuner is based on a 50Ω slabline and a reflective probe, sometimes referred to as a slug. Ideally, when the probe is fully retracted, the tuner presents a near- 50Ω impedance represented by the center of a normalized Smith Chart. As the probe is lowered into the slabline (Y-direction) it interrupts the electric field that exists between the center conductor and walls of the slabline, reflects some


of the energy back towards the DUT, creates a capacitance and increases the magnitude of reflection (represented by the red curve on the Smith Chart at right). As the probe travels along the slabline (X-direction), the distance between the probe and the DUT is altered, thereby rotating the phase of the reflection (represented by the blue curve on the Smith Chart). It is therefore possible to recreate nearly any arbitrary impedance without the need of discrete components (lumped elements or transmission lines).

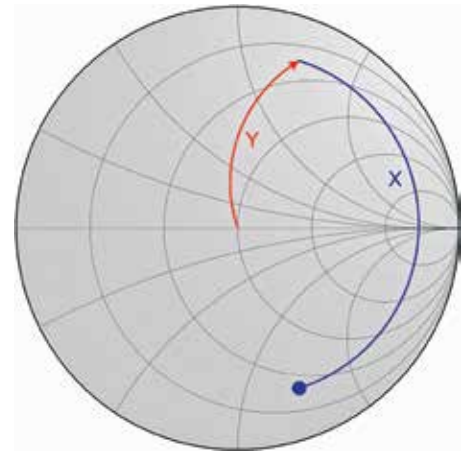

Simplified representation of a slide-screw tuner.

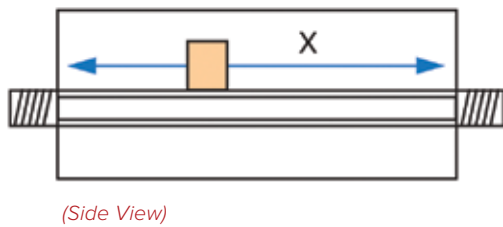

The probes used in slide-screw tuners are wideband in nature, and have similar reflective properties over a wide range of frequencies. In order to increase the overall useful bandwidth of the tuner, two probes of varying dimensions are independently used within a tuner; one for low frequencies and one for high frequencies. In this manner, it is common for slide-screw tuners to achieve an overall frequency range of several octaves to over a decade.

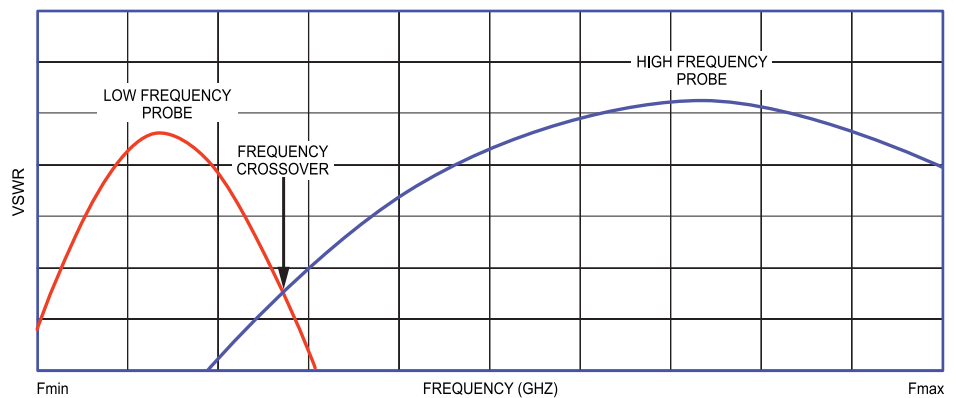

VSWR versus Frequency of a two-probe slide-screw tuner.


Pre-Calibration (Pre-Characterization)

Slide-screw tuners are available in both manual and automated varieties. While they both work on the same slabline and capacitive probe technique, automated tuners have the ability to be pre-calibrated. Pre-calibration involves recording the s-parameters of each probe at varying X and Y positions for the frequencies of interest using a calibrated vector network analyzer. In general, X and Y positions are selected such that an even distribution of impedances are recorded over the Smith Chart. Once the calibration data is stored in a lookup table, the VNA is no longer required to use the tuner; the tuner 'knows' how to present impedances accurately without VNA verification.

Tuner Repeatability

Tuner repeatability is defined as the vector difference between the pre-calibrated s-parameter data and subsequent s-parameter measurements after movement, when returning the probe to a given X and Y position. Since the impedances presented to the DUT are reliant on the tuner's ability to accurately return to pre-calibrated states, repeatability is a critical tuner characteristic that affects the reliability of measurement data. In order to guarantee a high level of repeatability, precision

mechanics and motors within the tuner are used to return the probe to its pre-calibrated positions with s-parameter vector differences of -40 to -50 dB or better (see specific tuner model pages 6 through 10 for typical repeatability graphs).

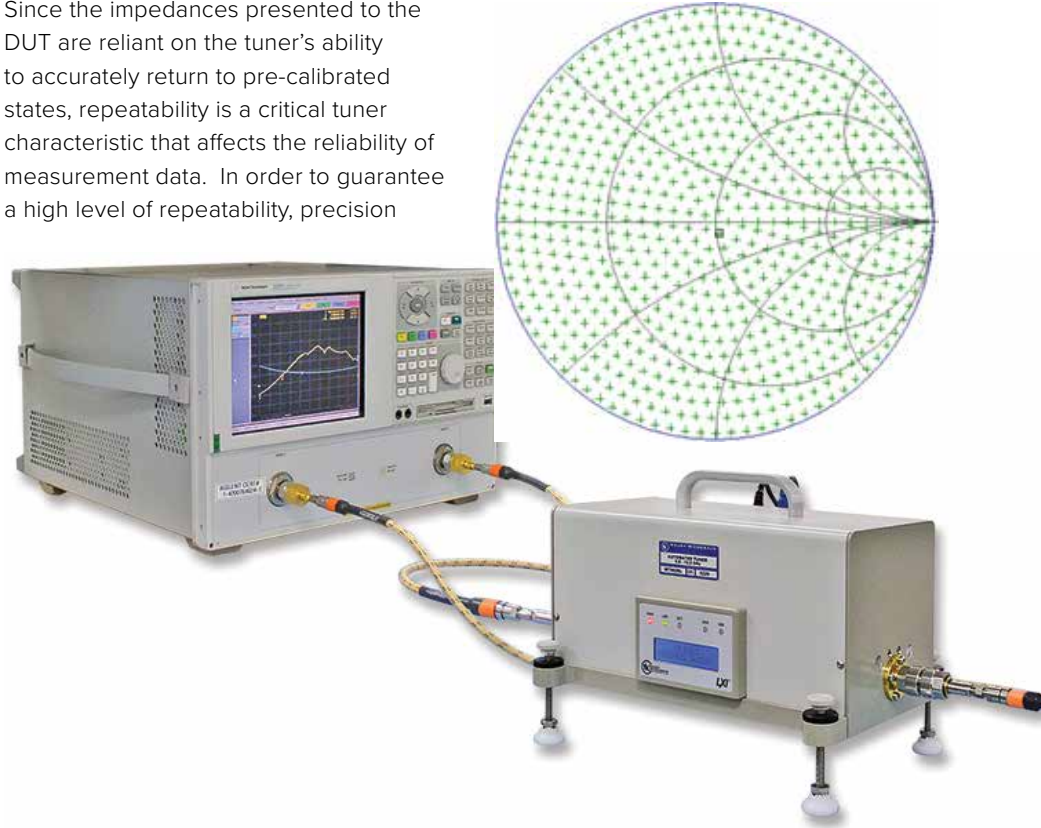


Tuning Accuracy and Interpolation

During pre-calibration, the tuner's s-parameters are recorded at a user-definable number (normally between 300-3000) of X and Y positions giving an even distribution over the Smith Chart. However, an arbitrary load impedance that falls between pre-calibrated states might be required. To achieve a high level of accuracy, a two-dimensional algorithm is used to interpolate between the closest pre-calibrated impedances

in order to determine the new physical X and Y positions of the desired interpolated impedance. Interpolation increases the number of tunable impedances well beyond the initial pre-calibration range.

Given a sufficiently dense pre-calibration look-up table, a tuner's repeatability (ability to return to pre-calibrated states) and accuracy (ability to interpolate between pre-calibrated states) offer similar performances.

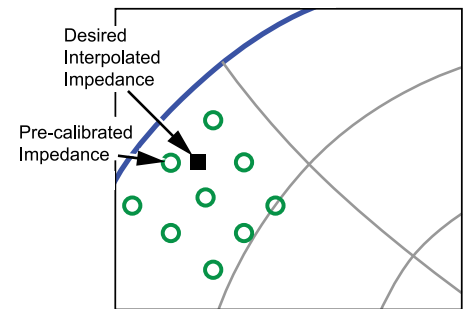

Patented XT Tuner Technology

(U.S. Patent No. 9,209,786)

XT Technology

XT-series tuners represent the next evolution in tuner technology. Faster, more accurate, more repeatable.

Upgraded mechanics result in a 5%-20% faster mechanical movement¹, 20%-40% faster tuner characterization² and 10%-15% faster VSWR test³.

Linear encoders on the horizontal axis ensure accurate carriage positioning and improve repeatability by 5-8dB⁴.

High-Speed Profile

Optional High Speed Profile further improves XT tuner speed and results in a 30%-80% faster mechanical movement¹, 40%-60% faster tuner characterization² and 25%-35% faster VSWR test³.

HIGH-SPEED PROFILE HAS BEEN OPTIMIZED FOR CONNECTORIZED MEASUREMENTS.

¹ MT982GL01 vs XT982GL01 moving in 1-360 degree steps at 2.45 GHz and 5.5 GHz.

² MT982GL01 vs XT982GL01 characterized at 550 points with N5242A PNA-X at 2.45 GHz and 5.5 GHz.

³ MT982GL01 vs XT982GL01 tuning VSWR circle of 10:1 with 10 degree steps at 2.45 GHz and 5.5 GHz.

⁴ MT982GL01 vs XT982GL01; Repeatability defined as re-measuring characterized state.



Patented LXI™-Certified Embedded Tuner Controller

(U.S. Patent No. 8,823,392)

All Maury slide-screw automated impedance tuners are equipped with a patented embedded LXI™-certified controller (U.S. Patent No. 8,823,392) with onboard microprocessor and memory. After pre-calibration, the lookup table is copied onto the tuner's embedded flash memory storage, as are any s-parameter files of passive components that will be used with the tuner (adapters, cables,

fixtures, probes, attenuators...). The tuner's onboard microprocessor will use the lookup table and component s-parameter blocks to calculate the probe positions required to present an arbitrary load impedance taking into account (de-embedding) all adapter/fixture losses between the tuner and DUT, and all back-side losses between the tuner and the measurement instrument, as well as possible non-50Ω terminations.

An integrated web interface allows for easy point-and-click tuning. Simply open Internet Explorer, Firefox, Chrome or any

web browser in any operating system, and begin tuning. Capabilities include a graphic interface for de-embedded tuning at the DUT reference.

Direct ASCII commands can be sent through raw TCP/IP interface over Ethernet or USB and used with any socket programming language or through any Telnet client program in any operating system. Commands include direct impedance tuning, reference-plane shifting, VSWR testing and more.

Parameter	Value
Manufacturer	Maury Microwave Corporation
Instrument Model	MT982-EL30
Serial Number	5270
Firmware Revision	3.4-1.24
Description	Maury MT982-EL30 - 5270
LXI Extended Features	LXI Core Functions
LXI Version	1.4
mDNS-Hostname	169.254.6.77, MT982-EL30-5270.local
IP Address	169.254.6.77
MAC Address	fc:6c:31:00:00:e6
Device Address	TCPIP0::169.254.6.77::5025::SOCKET
Telnet Address	telnet://169.254.6.77:5024

Parameter	Currently in use
VXI-11 Discovery	On
mDNS Discovery	On
DHCP	On
Auto-IP	On
Network-Hostname	MT982-EL30-5270.local
IP Address	169.254.6.77
Netmask	255.0.0.0
Gateway	0.0.0.0
Dynamic DNS Updates	On
Manual DNS	Off
Domain	Belkin
Primary DNS	10.10.1.17
Secondary DNS	10.10.1.19
Description	Maury MT982-EL30 - 5270
Web Password	hidden

Edit Configuration

The screenshot shows the 'Tuner Config' page with a block diagram of the tuner setup. The diagram includes a Fixture, Tuner 1 (MT982-EL30_5270), Back, and Term components. Below the diagram is a table of S-parameters for the Fixture, Tuner, Back, and Termination at 0.800000 GHz.

Component	Mag	Pha	s11	s12	s21	s22
Fixture	0.806	122.5	0.852	0.2	0.852	0.2
Tuner	0.504	122.3	0.852	0.2	0.852	0.2
Back	0.909	0.0	1.000	0.0	1.000	0.0
Termination	0.000	0.0				

The screenshot shows the 'Tuning' page with a Smith chart and tuning parameters. The Smith chart displays the current impedance and target values. The parameters are as follows:

Parameter	Value
Frequency	0.800000 GHz
Gamma	0.006
Phase	-101.690
Gamma (dB)	44.844
Phase (deg)	-101.690
Motor Position	100
Motor 1	100
Motor 2	0000
Motor 3	0000

7mm LXI™ -Certified Automated Tuners

Available Models

Model	Frequency Range (GHz)	Matching Range		Power Capability ¹	Vector Repeatability (Minimum)	Insertion Loss (Probes Fully Retracted)	Mating Surface Dimensions
		Minimum	Typical				
XT982GL01	0.6 – 18.0	10:1	18:1	50 W CW 0.5 kW PEP	-40 dB	0.5 dB	17.92" [45.52 cm]
XT982GL30	0.6 – 2.0	30:1	40:1				
	2.0 – 8.0	15:1	20:1			0.4 dB	10.92" [27.74 cm]
XT982AL02	1.8 –18.0	15:1	20:1				

¹ Power rated at maximum VSWR.

Accessories Provided

Each tuner is provided with one (1) MT1020F power supply, one (1) USB cable, one (1) Ethernet cable, one (1) USB to Ethernet adapter, and one (1) operating manual.

Recommended Accessories

2698C2 Torque Wrench

Recommended for tightening all 7mm precision connectors to the proper in. lbs without over-torquing the connection.



2698C2


A028D 7mm Connector Gage Kit

Recommended for checking the critical interface dimensions of precision 7mm connectors. Dial indicator style. Thread-on connector.


A028D



Exemplary Performance Data for Model XT982GL01 7mm Automated Tuners

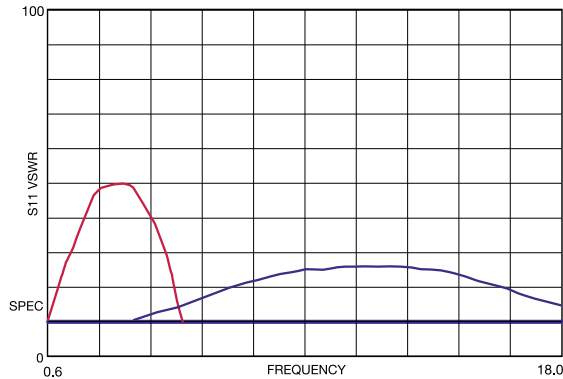

VSWR versus Frequency for XT982GL01 7mm Automated Tuners.

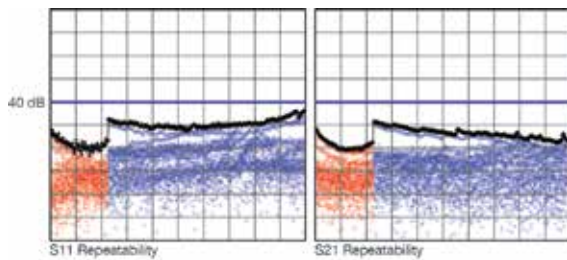

Repeatability for XT982GL01 7mm automated tuners.



XT982 GL01

Products covered by one or more of the following patents
9,209,786 / 8,823,392 / 7,589,601 B2

Specifications

Frequency Range -- 0.6 to 18.0 GHz
 VSWR Matching Range
 Minimum -- 10:1
 Typical -- 18:1¹
 Step Size (Probes) -- 7.8 microinches²
 Step Size (Carriage) -- 62.5 microinches²

Power Capability -- 50 W CW; 0.5 kW PEP³
 Vector Repeatability (Min) -- -40 dB
 Insertion Loss (probes fully retracted) -- 0.5 dB
 Connectors -- 7mm⁴


¹ Defined as the minimum VSWR over 70% of the frequency range.

² Based on microstepping (1/16) the drive motors.


³ Power rated at maximum VSWR.

⁴ Precision 7mm per Maury data sheet 5E-060.

Exemplary Performance Data for Model XT982GL30 7mm Automated Tuners

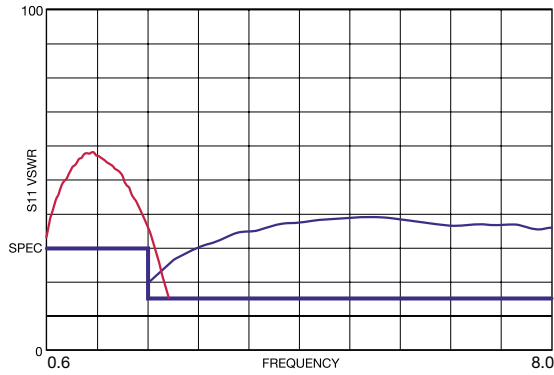

VSWR versus Frequency for XT982GL30 7mm Automated Tuners.

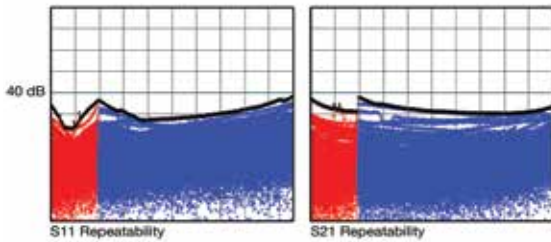

Repeatability for XT982GL30 7mm automated tuners.



XT982 GL30

Products covered by one or more
of the following patents
9,209,786 / 8,823,392 / 7,589,601 B2

Specifications

Frequency Range -- 0.6 to 8.0 GHz
 VSWR Matching Range
 Minimum (0.6 - 2.0) -- 30:1
 Minimum (2.0 - 8.0) -- 15:1
 Typical (0.6 - 2.0) -- 40:1¹
 Typical (2.0 - 8.0) -- 20:1¹
 Step Size (Probes) -- 7.8 microinches²
 Step Size (Carriage) -- 62.5 microinches²

Power Capability -- 50 W CW; 0.5 kW PEP³
 Vector Repeatability (Min) -- -40 dB
 Insertion Loss (probes fully retracted) -- 0.5 dB
 Connectors -- 7mm⁴


¹ Defined as the minimum VSWR over 70% of the frequency range.

² Based on microstepping (1/16) the drive motors.


³ Power rated at maximum VSWR.

⁴ Precision 7mm per Maury data sheet 5E-060.

Exemplary Performance Data for Model XT982AL02 7mm Automated Tuners

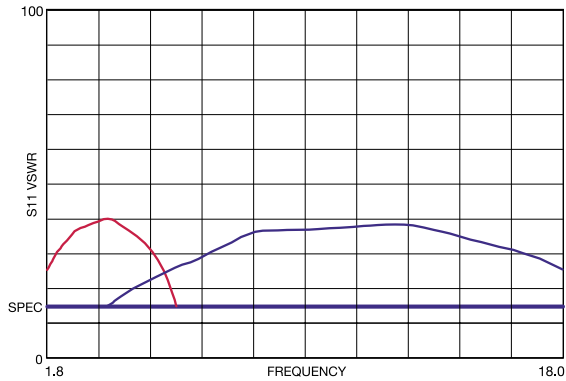

VSWR versus Frequency for XT982AL02 7mm Automated Tuners.

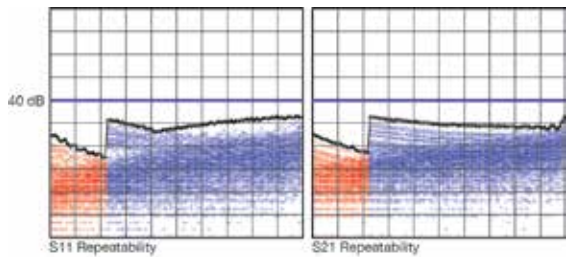

Repeatability for XT982AL02 7mm automated tuners.



XT982 AL02

Products covered by one or more
of the following patents
9,209,786 / 8,823,392 / 7,589,601 B2

Specifications

Frequency Range -- 1.8 to 18.0 GHz ¹
 VSWR Matching Range
 Minimum -- 15:1
 Typical -- 20:1¹
 Step Size (Probes) -- 7.8 microinches ²
 Step Size (Carriage) -- 62.5 microinches ²

Power Capability -- 50 W CW; 0.5 kW PEP ²
 Vector Repeatability (Min) -- -40 dB
 Insertion Loss (Max) -- 0.4 dB ³
 Connectors -- 7mm ⁴


¹ Defined as the minimum VSWR over 70% of the frequency range.

² Based on microstepping (1/16) the drive motors.

³ Power rated at maximum VSWR.

⁴ Precision 7mm per Maury data sheet 5E-060.

VISIT OUR WEB STORE
TO LEARN MORE ABOUT
OUR PRODUCTS

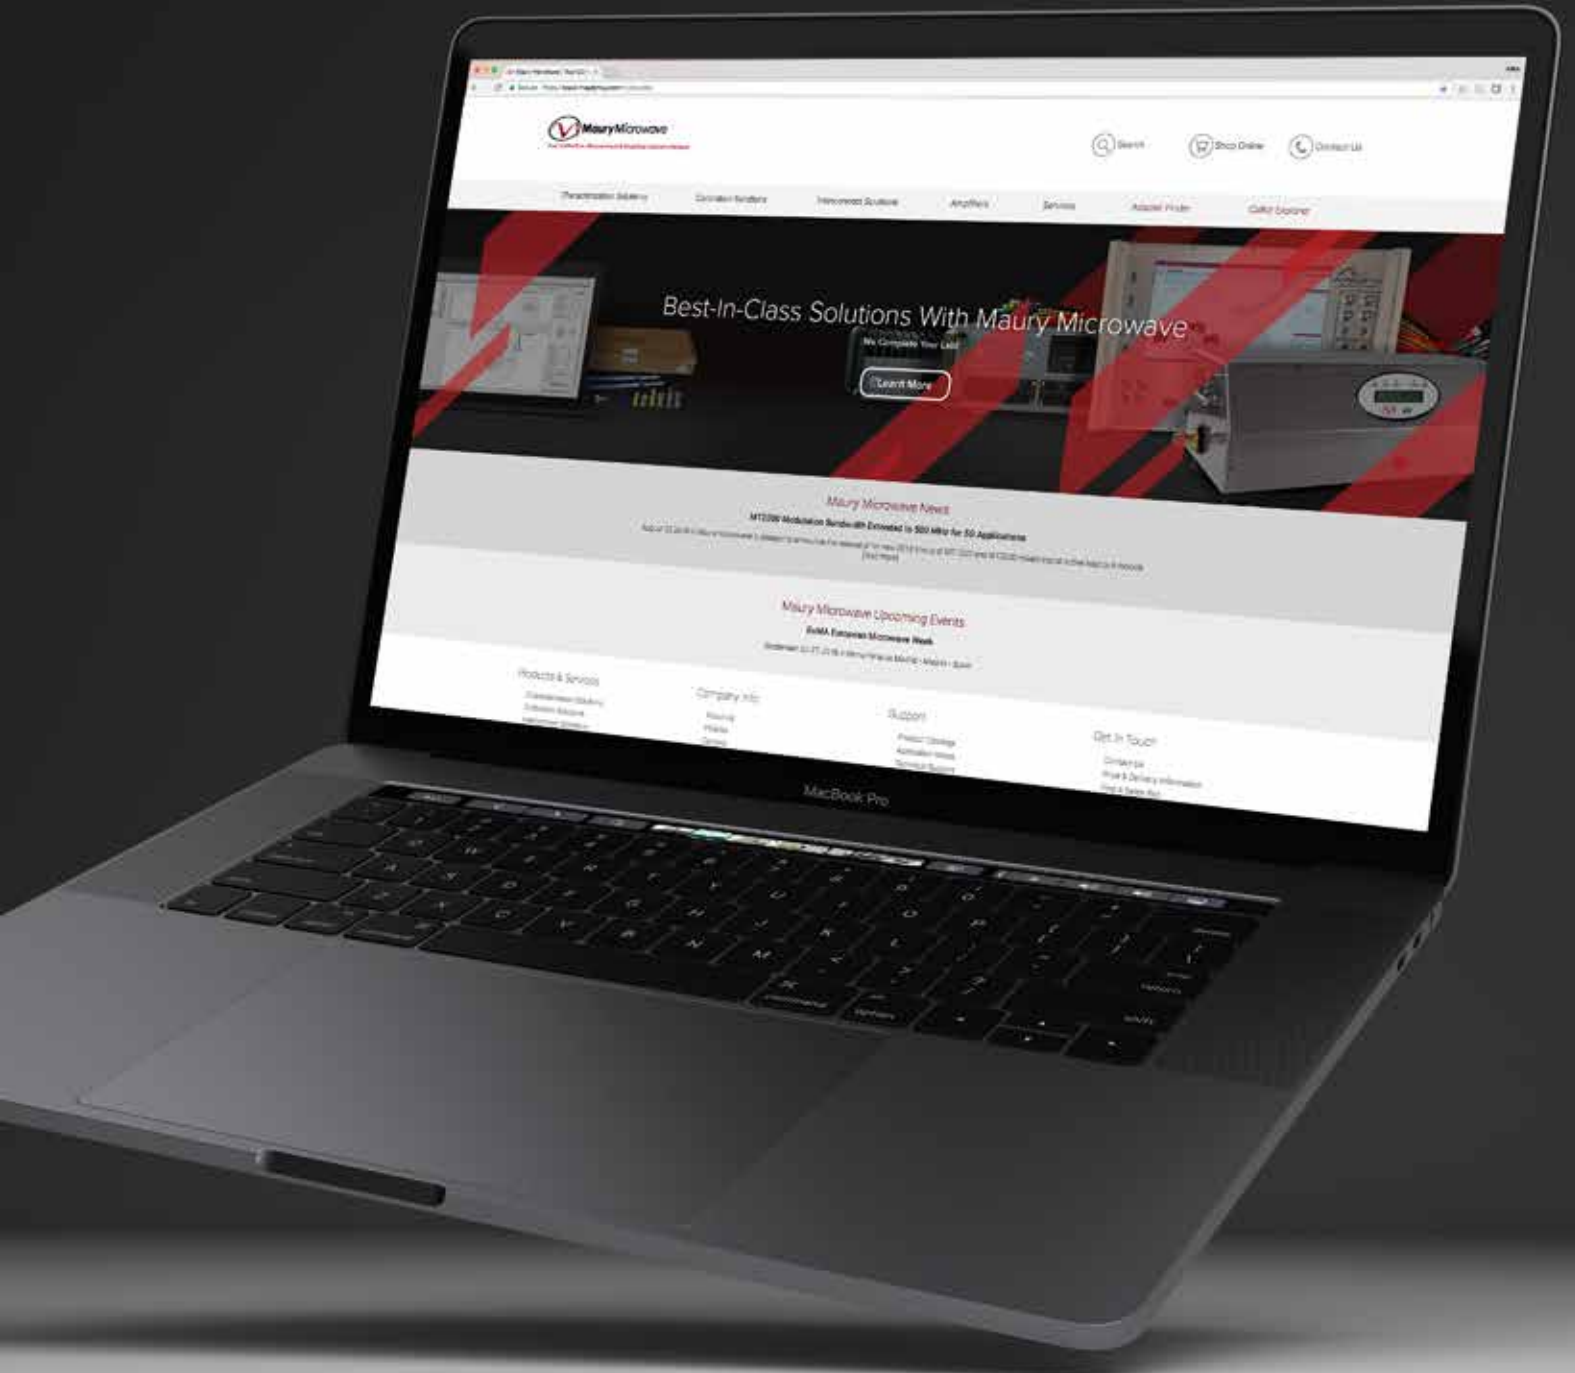

www.maurymw.com



CONTACT US:

W / maurymw.com

E / maury@maurymw.com

P / +1-909-987-4715

F / +1-909-987-1112

2900 Inland Empire Blvd

Ontario, CA 91764

