

ATS-850-M THERMOSTREAM®

DATASHEET AND SPECIFICATIONS

-90° to +300°C



Designed for **60Hz operation only**, this Advanced Temperature Source is for fast and precise thermal conditioning of components, parts, hybrids, modules, subassemblies, and printed circuit boards. Capable of ultra-low temperatures **without** the use of Liquid Nitrogen (LN₂) or Liquid Carbon Dioxide (LCO₂).

PERFORMANCE:

Temperature Range*

-90 to +300°C

No LN₂ or LCO₂ Required

Transition Rate*

-55 to +125°C, approx. 10 seconds or less

125 to -55°C, approx. 10 seconds or less

System Airflow Output*

4 to 18scfm (1.9 to 8.5 l/s) Continuous

* under nominal operating conditions
ultimate low (±1.0°C) achieved at 18scfm
ultimate high (±1.0°C) achieved at 16scfm

TEMPERATURE CONTROL:

Temperature Display & Resolution

+/- 0.1°C

Temperature Accuracy


1.0°C (when calibrated against NIST standard)

DUT Temperature Control


proprietary control algorithm enables DUT temperature to be directly controlled

DUT Sensor Ports

internal diode, thermocouples (T & K),
RTD (100 Ohm platinum)

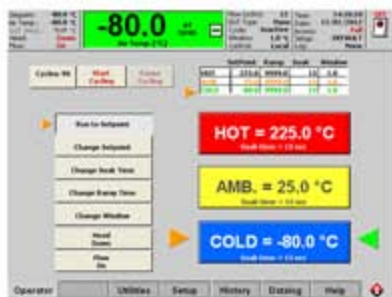

OPERATOR SCREEN

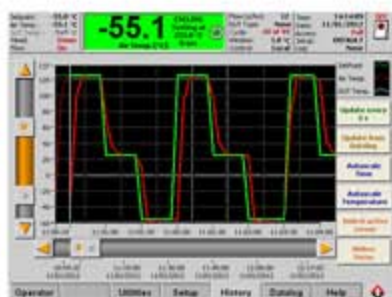

DATALOG SCREEN

FEATURES:

► Frost Free Feature

dry air purge for tester interface, prevents condensation: 0.5 to 3scfm (0.25 to 1.5 l/s)

► ECO Friendly Features

Automatic Power Reduction

reduces power usage during idle periods

Heat Only Mode

reduces power usage when cold temperatures are not used

► Heated Defrost Feature

quickly removes moisture buildup from internal chiller

► Fully Adjustable Thermal Head

► Thermal Cap

5.5 inch ID, High Temperature Rated Thermal Cap or optional

► Windows® OS

► Local & Remote Operations

► LabView™ & LabWindows® drivers

► On-Screen Help

► Ethernet, IEEE-488, RS232 ports

► USB, keyboard, mouse, & printer ports


► customizable and savable test setups

► Program & Datalog Storage (via ethernet or USB)


► User Defined Temperature Limits



System Dimensions - Standard

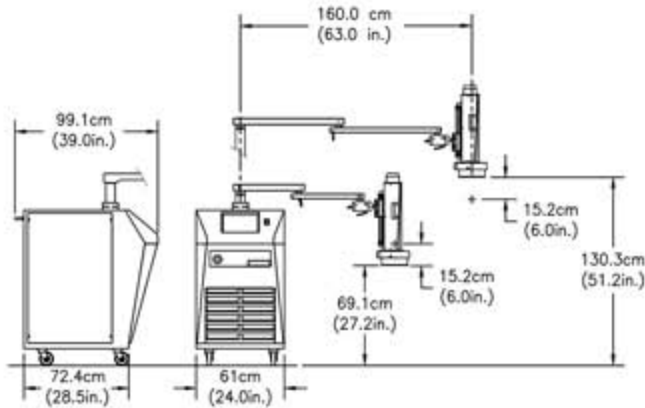

System Dimensions - Extended Height

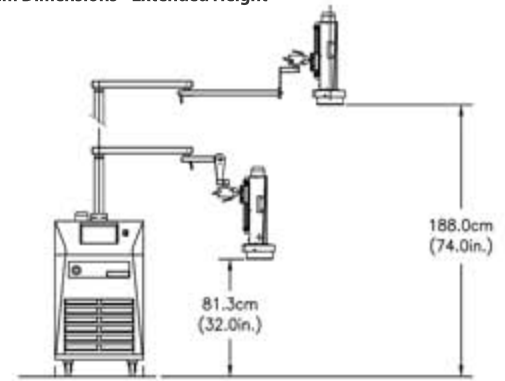

Weights and Dimensions

Base¹

Width: 61.0 cm (24 in.), Depth: 72.4 cm (28.5 in.)

Height: 108 cm (42.5 in.)

System Weight

Not packed: 236 kg (520 lbs.)

Packed: 365 kg (805 lbs.)

Mobility

Four static dissipative, swivel caster wheels

Maximum Reach

160.0cm (63 in.)

Maximum Operating Height

130.3 cm (51.2 in.) - extended height option: 188.0 (74.0 in.)

Minimum Operating Height

69.1 cm (27.2 in.) - extended height option: 81.3 (32.0 in.)

Noise Level

<65dBA

¹ an additional 20.3cm (8 in.) clearance is required for supply connections and cabinet ventilation

Service and Safety

Refrigerants

HCFC and CFC-free, non-toxic, non-flammable

Serviceability

Auto-diagnostics and field replaceable modules

Over Temperature Protection

+305°C (factory set): Operator can set high and low air temperature limits

Facility Requirements

Power²

60Hz only, system does not operate at 50Hz

200 - 250 VAC (230V nominal), 60Hz, 30 amp, 1phase

Compressed Air³

Clean, Dry Air (CDA)

Filtered to 5 micron particulate contamination.

Oil Content: <0.1 ppm, by weight, filtered to 0.01 micron oil contaminant.

Dewpoint: <10°C @ 6.2 BAR (90PSI)

6.2 to 7.6 BAR (90 to 110 PSIG)

7.1 to 14.2 l/s (15-30 scfm)

11.8 l/s (25 scfm) nominal

+20° to +25°C; +22°C nominal

Air Supply Pressure

Total Air Flow Rate Required

Air Supply Temperature

Operating Environment³

Operating Temperature

+20° to +28°C; +23°C nominal

Humidity

0 to 60%; 45% nominal



inTEST Thermal Solutions
41 Hampden Road
Mansfield, MA 02048
TEL: 1.781.688.2300
www.inTESTthermal.com

ISO 9001 Certified



² System is configured for operation within voltages listed above using an internal transformer. Please specify power configuration with order

³ Under operating conditions which are greater or less than nominal, performance may be less than specification provided